


TYPE MPV50 - MPV300

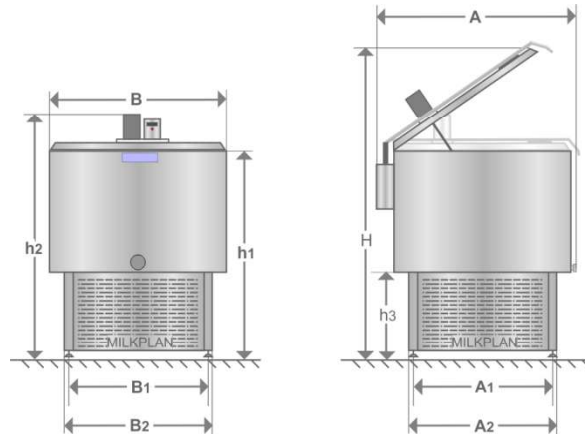


DIMENSIONS/mm

Milk Cooling tank type	A	A1	A2	B	B1	B2	H	h1	h2	h3
MPV50	560	280	365	520	280	365	1350	820	1050	440
MPV100	780	330	400	680	410	500	1660	980	1190	420
MPV200	1030	530	610	890	530	610	1520	990	1220	420
MPV300	1130	530	620	990	530	610	1700	1030	1250	420

TECHNICAL SPECIFICATIONS

Milk Cooling tank type	Maximum capacity Liters	Weight Kg	Fan cooled condensing unit type	Voltage	Refrigerant type	Refrigeration capacity Watt	Maximum Power Rate	Run current	Maximum current	Number of milking
MPV50	51	52	AEZ 9440Z L'Unite	220V-240V 50Hz, 1~	R 404A	835W 1/3Hp	580W	3,52A	4,65A	2
MPV100	125	72	NEK6210GK ASPERA	220V-240V 50Hz, 1~	R 404A	1023W 1/2Hp	703W	4,03A	4,54A	2
MPV200	245	110	NT6224GK ASPERA	220V-240V 50Hz, 1~	R 404A	2190W 1Hp	1303W	6,27A	7,30A	2
MPV200	245	110	NEK6210GK ASPERA	220V-240V 50Hz, 1~	R 404A	1023W 1/2Hp	703W	4,03A	4,54A	4
MPV300	336	128	NJ9232GK ASPERA	220V-240V 50Hz, 1~	R 404A	2578W 1_1/4Hp	1612W	7,67A	9,16A	2
MPV300	336	128	NT6224GK ASPERA	220V-240V 50Hz, 1~	R 404A	2190W 1Hp	1303W	6,27A	7,30A	4
MPV300	336	128	TAJ9513 L'Unite	380V-400V 50Hz, 3~	R 404A	2578W 1_1/4Hp	1450W	3,10A	4,47A	2

TYPE MPV400 - MPV2500

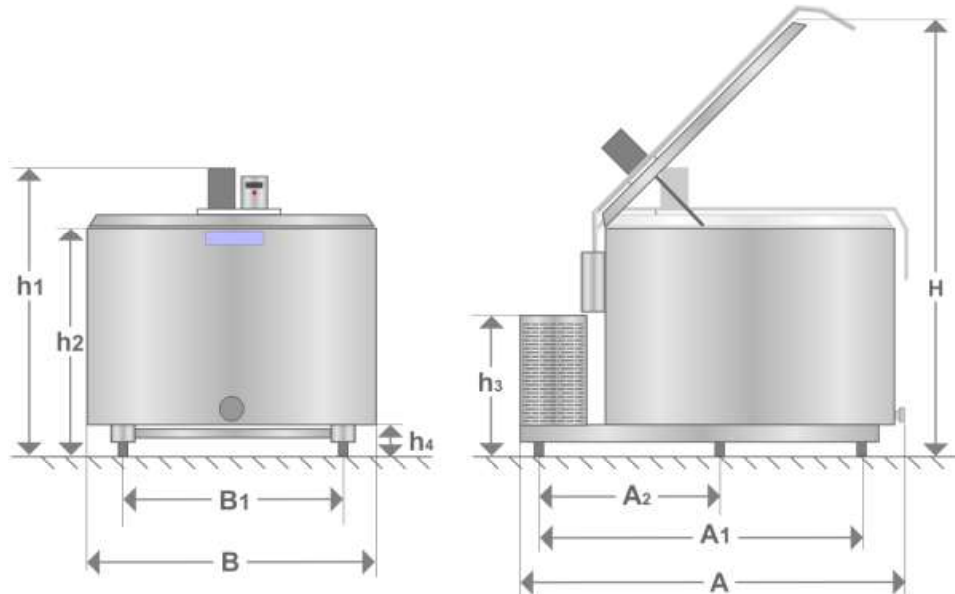

DIMENSIONS/mm

Model	A	A1	A2	B	B1	H	h1	h2	h3	h4	H with handle
MPV400 Compact 2 milking	1670	950	-	1090	670	1445	1050	830	685	180	1555
MPV400 4 milking	1830	1250	-	1090	670	1555	1050	830	685	180	1555
MPV500 Compact 2 milking	1620	950	-	1090	670	1620	1190	965	685	180	1705
MPV500 4 milking	1830	1380	-	1090	670	1705	1190	965	685	180	1705
MPV650 Compact	1600	950	-	1090	670	1765	1345	1120	685	180	1830
MPV800 2 milking	2140	1630	-	1290	925	1740	1265	1040	685	192	1985
MPV800 Compact 4 milking	1770	1310	-	1290	925	1910	1265	1040	685	192	1985
MPV1000	2350	1320	450	1495	910	1975	1250	1010	840	192	1975
MPV1250	2320	1320	450	1495	940	2090	1495	1150	840	192	2050
MPV1500	2320	1560	590	1495	1140	2200	1645	1300	818	192	2250